


1 Installation and Startup Guide

This document covers the installation of MT8052iP Series HMI, for the detailed specifications and operation, please refer to Datasheet, Brochure and EasyBuilder Pro User Manual. Please read all warnings, precautions, and instructions on the device carefully before use.

Install Environment:

NEMA Rating	The HMI product is NEMA 4 rated (indoor use only).
Electrical Environment	The HMI product has been tested to conform to European CE requirements. This means that the circuitry is designed to resist the effects of electrical noise. This does not guarantee noise immunity in severe cases. Proper wire routing and grounding will insure proper operation.
Environmental Considerations	(1) Make sure that the displays are installed correctly and that the operating limits are followed. Avoid installing units in environments where severe mechanical vibration or shocks are present. (2) Do not operate the unit in areas subject to explosion hazards due to flammable gases, vapors or dusts. (3) Do not install the unit where acid gas, such as SO2 exists. (4) This device should be mounted in the vertical position and for use on the flat surface enclosure. (5) For use in Pollution Degree 2 Environment and dry location. (6) Relative Humidity: 10% ~ 90% (non-condensing)
Cleaning Considerations	Clean the device using dry cloths. Do not use liquid or spray detergents for cleaning.
IP Rating	IP 65
 Warning	Protection impairment if used in a manner not specified by the manufacturer. Déficit de protection si utilisé d'une manière non spécifiée par le fabricant.

2 Unpacking the Unit

Unpack and check the delivery. If damage is found, please contact the supplier.

NOTE: Place the operator panel on a stable surface during installation. Dropping it or letting it fall may cause damage.

The package includes:

- (1) Installation Instruction, 2-sided A4 *1
- (2) Human Machine Interface *1
- (3) Power Connector *1
- (4) Brackets & Screws *1 pack


3 Installation Instructions

Use a control box that provides enough stiffness. Cutout Dimension: 119 mm x 93 mm. Secure the operator panel in position, using all the fastening holes and the provided brackets and screws. Screw Torque: 2.6 ~ 3.9 lbf.in. (For reaching waterproof effect and preventing the panel from being deformed.)

Plan for adequate space around the unit and inside the enclosure, for ventilation and cables. Consider the heat from other devices inside the enclosure. The ambient temperature around the unit must be 0 ~ 55°C

Minimum required clearances (along the overlay): Top 15 mm / Bottom 50 mm / Sides 15 mm

Maximum panel thickness: 4.5 mm

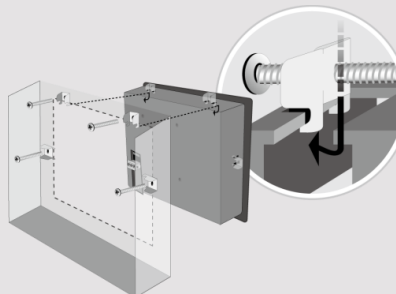

4 Power Connections



Power Connector Specifications:
Wire AWG: 24~12
Wiring Conductor Minimum Temperature: 0°C
Screw Torque: 4.5 lbf-in (max.)
Copper conduct only.

NOTE:

1. Connect positive DC line to the '+' terminal and ground to the '-' terminal.
2. When downloading project using EasyBuilder Pro, do not connect HMI with PLC and PC simultaneously. A potential difference may result in damage.

5 System Settings

When HMI is powered up and displays the EasyBuilder Pro logo, press the Home button. (Default System Password: 111111)

Go to Security tab, the default password is 111111. Press the buttons to set your own passwords. In MISC2 tab, if "Enable [Reset HMI to factory default]" is selected, the [Reset to factory default] button can be found in calibration mode. (Please refer to Part 8.)



6 EasyBuilder Pro Software

Launch EasyBuilder Pro software, select the 'File' menu > 'Open' dialog box: Select Ethernet > IP tab > select the HMI file to HMI.

Using screensaver and backlight save settings. Press the Home button by displaying the same image on HMI. (Please refer to EasyBuilder Pro User Manual.)

7 Communication Connections

NOTE: COM1 / COM3 RS485 2W support MPI 187.5K, please use one at a time.

9 Pin, Male, D-sub
COM1 [RS232]
COM1 [RS485]
COM3 [RS485]

1 2 3 4 5
6 7 8 9

PIN#	COM1 [RS485]		COM1 [RS232] 2W	COM3 [RS485] 2W
	4W	2W		
1	Rx-	Data-		
2	Rx+	Data+		
3	Tx-			
4	TX+			
5	GND			
6			TxD	
7				Data-
8				Data+
9			RxD	

8 Touchscreen Calibration Mode

Press and hold anywhere on the screen when HMI starts until it enters touchscreen calibration mode. If "Enable [Reset HMI to default] button in calibration mode" is selected as described in Part 5 System Settings, then [RESET HMI TO DEFAULT] and [SYSTEM SETTINGS] buttons can be found in calibration mode. Follow the onscreen guide and press [yes] to restore factory default, and please note that the projects and data stored in the unit will all be cleared after this.



9 Battery Replacement

Battery Specification: Type CR1220, Rated 2V

Battery replacement shall be performed by qualified personnel (engineer) only and care must be taken when handling lithium batteries. For more information on battery replacement and disposal considerations, please refer to the following link:

http://www.weintek.com/download/MT8000/eng/FAQ/FAQ_103_Replace_Battery_en.pdf

CAUTION

⚠ Power

NOTE: Make installing the u

Use power output powered by DC p systems. The pow supply. The peak s

⚠ Fusing Requirements

If the display does will protect agains period of time. Che

⚠ High Voltage

A resettable fuse. DC voltage source

⚠ Emergency Stop

A Hard-wired EME ICS Safety Recom

⚠ Supply Voltage Condition

Do not power the u power supply. Note power the unit.

⚠ Wire Routing

- Power wire len
- Please use twi impedance ma
- If wiring is to b devices.
- Keep AC, high
- Add a resistor supply and the dissipation. Ty

DANGER

⚠ Hardware Considerations

The system desig thereby create an interface can lea physical injury to th If you use any pr potential safety ha steps depend on installation of soli installation of Cont

⚠ Programming Considerations

To conform to ICS ensure that all wr checks built into th personnel.

Limited Warranty

This product is limited warranted ag The proven defective product will e This warranty shall not cover any p (a) Out of warranty period which is 12 month (b) Damage caused by Force Majeure, acci (c) Product has been repaired or taken apar (d) Products whose identification markings h