


cMT-SVR-200 cMT-SVR-202 series

Installation Instruction

1 Installation and Startup Guide

This document covers the installation of cMT-SVR-200/202 Series, for the detailed specifications and operation, please refer to Datasheet, Brochure and EasyBuilder Pro User Manual. Please read all warnings, precautions, and instructions on the device carefully before use.

Install Environment:

Electrical Environment	The HMI product has been tested to conform to European CE requirements. This means that the circuitry is designed to resist the effects of electrical noise. This does not guarantee noise immunity in severe cases. Proper wire routing and grounding will insure proper operation.
Environmental Considerations	(1) Make sure that the units are installed correctly and that the operating limits are followed. Avoid installing units in environments where severe mechanical vibration or shocks are present. (2) Do not operate the unit in areas subject to explosion hazards due to flammable gases, vapors or dusts. (3) Do not install the unit where acid gas, such as SO ₂ exists. (4) This device should be mounted in the vertical position and for use on the flat surface enclosure. (5) Conform to UL 61010-2-201 safety requirement for use in Pollution Degree 2 Environment and dry location. (6) Relative Humidity: 10% ~ 90% (non-condensing)
Cleaning Considerations	Clean the device using dry cloths. Do not use liquid or spray detergents for cleaning.
IP rating	IP 20
 Warning	Protection impairment if used in a manner not specified by the manufacturer. Déficit de protection si utilisé d'une manière non spécifiée par le fabricant.

2 Unpacking the Unit

Unpack and check the delivery. If damage is found, notify the supplier.

NOTE: Place the unit on a stable surface during installation. Dropping it or letting it fall may cause damage.


(1) Installation Instruction, A4 double sided *1 (2) Power Connector *1 (3) cMT-SVR *1 (4) Antenna 2dBi

3 Installation Instructions

Rail mounting: DIN rail 35mm

Panel mounting: Use two M4 or #8 panhead screws, mounting hole size is 4.6mm

Plan for adequate space around the unit and inside the enclosure, for ventilation and cables. Consider the heat from other devices inside the enclosure. The ambient temperature around the unit must be 0 ~ 50°C

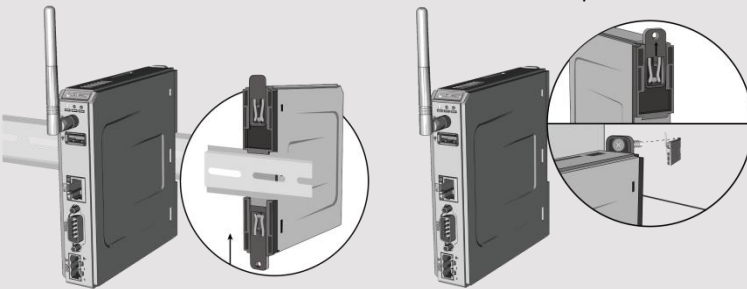

4 Power Connections



Power Connector Specifications:
Wire AWG: 24~12
Wiring Conductor Minimum Temperature: 0°C
Screw Torque: 4.5 lbf-in (max.)
Copper conduct only.

Spécifications du connecteur d'alimentation:
AWG de fil: 24 ~ 12
Température minimale du conducteur: 0°C
Couple de vis: 4.5 lbf-in (max.)
Conducteur en cuivre seulement

NOTE: Connect positive DC line to the '+' terminal.

5 System Settings

cMT-SVR can be connected by the following two ways:
Way1. Connect through Ethernet 1: Connect EasyBuilder Pro on your computer, open the EasyBuilder Pro software, and connect to cMT-SVR.

Way2. Connect through Wi-Fi: By default, the cMT-SVR is connected to the Wi-Fi network using a password. Launch EasyBuilder Pro in this document to find this cMT-SVR. After connecting cMT-SVR successfully, go to the System Settings page, and then enter the password.



6 EasyBuilder Pro Software Settings

Launch EasyBuilder Pro software, select your project file, press F7 shortcut key to open the download dialog box: Select Ethernet > HMI Name tab > Select your cMT-SVR > Click Download to download this project file to cMT-SVR.

(Please refer to EasyBuilder Pro User Manual for software operation details)

This device is preloaded with more secured EasyWeb 2.0 and thus requires EasyBuilder Pro V6.04.01 or later. For further assistance, please contact our distributor.


7 Communication Connection

NOTE: COM2 and COM3 [RS485] support MPI 187.5K, please use one at a time.

9 Pin, Male, D-sub
COM1 [RS232]
COM2 [RS485]
COM3 [RS485]

1 2 3 4 5
6 7 8 9

PIN#	COM1 [RS-232]	COM2 [RS-485]		COM3 [RS-485 2W]
		2W	4W	
1				Data+
2	RxD			
3	TxD			
4				Data-
5	GND			
6		Data+	Rx+	
7		Data-	Rx-	
8			Tx+	
9			Tx-	



SW1	SW2	Mode
OFF	OFF	Normal Mode
ON	OFF	Restore Ethernet IP Settings
OFF	ON	Boot Loader Mode
ON	ON	Restore Factory Default

8 DIP SW Settings

Turn ON SW1 and power the unit again, the IP setting is restored to default:

Ethernet 1: DHCP

Wi-Fi: DHCP

When restore factory default, the projects and data stored in the unit are all cleared.

Pressing the Reset button can reboot the unit.

9 Battery Replacement

Battery Specification: UL Certification Battery, Type CR1220, Rated 3V, Max. Abnormal Charging Current 10mA, Working Temperature: max. 70°C

Battery replacement shall be performed by qualified personnel (engineer) only and care must be taken when handling lithium batteries. For more information on battery replacement and disposal considerations, please refer to the following link:

http://www.weintek.com/download/MT8000/eng/FAQ/FAQ_103_Replace_Battery_en.pdf

CAUTION

Power

NOTE: Make s
installing the un

Use power output th
powered by DC pow
systems. The power
supply. The peak sta

Fusing Require-
ments

If the Power LED do
fuse will protect aga
period of time. Chec

High Voltage

A resettable fuse wi
DC voltage sources

Emergency Stop

A Hard-wired EMER
ICS Safety Recomm

Supply Voltage
Condition

Do not power the un
power supply. Note:
current to power the

Wire Routing

- Power wire leng
- Please use twist
impedance matc
- If wiring is to be
devices.
- Keep AC, high e
- Add a resistor an
supply and the fr
dissipation. Typi

DANGER

Hardware
Considerations

The system design
thereby create an
interface can lead
physical injury to the
If you use any prog
potential safety haza
steps depend on yo
installation of solid-
installation of Contro

Programming
Considerations

To conform with ICS
ensure that all writ
checks built into the
personnel.

Limited Warranty

This product is limited warranted a
defective product will either be repa
shall not cover any product which i

- Out of warranty period which is 12 mont
- Damage caused by Force Majeure, acci
- Product has been repaired or taken apa
- Products whose identification markings i