



Feature

- IPS LCD providing wide viewing angle up to 178 degrees.
- Tempered Glass, Capacitive Type Touch Panel which supports 2-finger gestures.
- Compact Design and Seamless Panel Mount
- Brightness Adjustable through cMT-FHD System Settings.
- HDMI™ Video Input
- USB Touch Interface
- IP65 Compliant Front Panel


Display	Display	21.5" IPS
	Resolution	Full HD 1920 x 1080
	Brightness (cd/m ²)	250
	Contrast Ratio	1000:1
	Backlight Type	LED
	Backlight Life Time	>50,000 hrs.
	Colors	16.7M
	LCD Viewing Angle (T/B/R/L)	89/89/89/89
	Pixel Pitch (mm)	0.2479 (H) x 0.2479 (V)
Touch Panel	Type	Tempered Glass, Capacitive Type (Supports 2-Finger Gestures)
	Hardness Scale	6H
Memory	Flash	N/A
	RAM	N/A
Processor		N/A
I/O Port	SD Card Slot	N/A
	USB Host	USB 2.0 x 1
	USB Client	USB 2.0 x 1 (Micro USB)
	HDMI	Yes (Video Input)
	Audio Output	N/A
RTC		N/A
Power	Input Power	24±20%VDC
	Power Isolation	Built-in
	Power Consumption	1.56A@24VDC
	Voltage Resistance	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ at 500VDC
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Specification	PCB Coating	Yes
	Enclosure	Aluminum
	Dimensions WxHxD	546 x 354 x 56.2 mm
	Panel Cutout	532 x 340 mm
	Weight	Approx. 4.9 kg
	Mount	Panel mount, VESA mount 100 x 100 mm
Environment	Protection Structure	NEMA4 / IP65 Compliant Front Panel
	Storage Temperature	-20° ~ 60°C (-4° ~ 140°F)
	Operating Temperature	0° ~ 50°C (32° ~ 122°F)
	Relative Humidity	10% ~ 90% (non-condensing)
Certificate	CE	CE marked
	UL	cULus Listed
Software	Display	N/A

*Protection Structure IP65 can be expected when waterproof gasket is properly installed.


*The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Документ предоставлен компанией "Русавтоматика". WWW.RUSAVTOMATIKA.COM


Dimensions




Top View

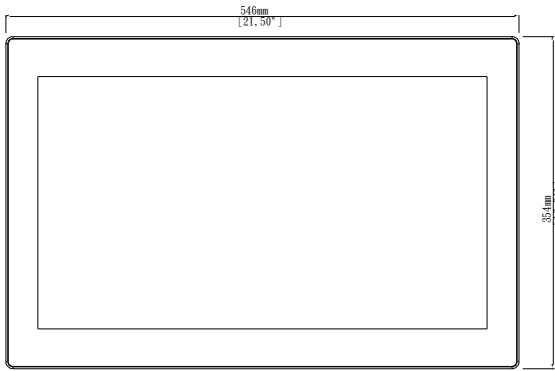


Front View

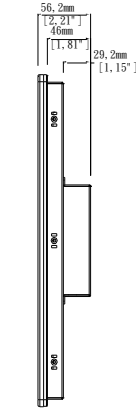


Side View

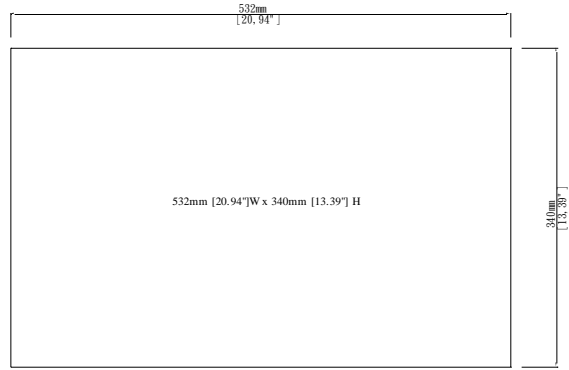

Cutout Dimensions

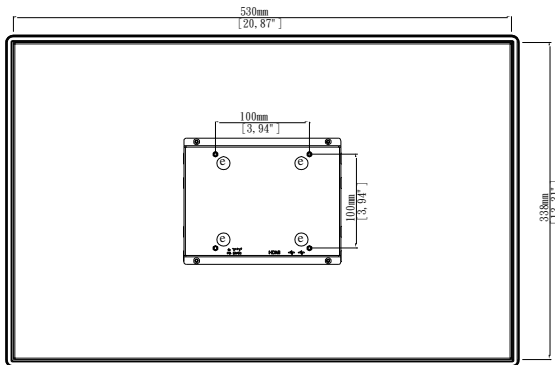

Rear View



Bottom View

a	Power Connector
b	HDMI Port
c	USB Client Port (Micro USB)
d	USB Host Port
e	VESA 100 mm Screw Holes

Ordering Information

□ cMT-iM21: 21.5" Touch LCD Monitor

Users must have the following items prepared:
 Micro USB to USB Type-A Cable
 HDMI cable
 Power supply 24V 50W (above)