

## Features



- Low Power Consumption Panel PC
- Intel® Celeron® Processor N2930
- Onboard DDR3L 4GB 1333/1600MHz
- IP66/IP69K rated with M12 connector
- SUS304 Grade Stainless Steel Enclosure (SUS 316 Optional)
- Full Flat Bezel and Fanless Design
- Projective Capacitive Touch/Resistive Touch Window
- 9~36V DC Wide-ranging Power Input

## Specifications

System	
Processor	Intel® Celeron® Processor N2930
System Chipset	SoC
System Memory	Onboard DDR3L 4GB 1333/1600MHz

External I/O	
USB	1 x M12 8-pin for 1 x USB 3.0
Serial/Parallel	1 x M12 8-pin for RS-232/422/485, COM1, Default RS-232 1 x M12 8-pin for RS-232, COM2
LAN	1 x M12 8-pin for GbE LAN
Power	1 x M12 3-pin DC Power
Optional I/O (either one)	1 x M12 8-pin for 2 x USB 2.0 (Default) 1 x Power Switch

Expansion	
Expansion slot	1 x Mini PCIe full size For optional WLAN/BT Module and Antenna at rear side

Storage Space	
Storage	1 x 2.5" SATA HDD or SSD, Easily Accessible 1 x Internal SD Card Slot Onboard

LCD	
Display Type	15" TFT-LCD
Max. Resolution	1024 x 768
Max. Color	16.7M
Luminance (cd/m <sup>2</sup> )	420
View Angle	H: 160/V: 160
Contrast	800:1
Backlight Lifetime	50,000 Hrs


Touch Screen – Projected Capacitive Touch (APC-3594P)	
Interface	USB
Light transmission (%)	90%

Touch Screen – Resistive Touch Screen (APC-3594R)	
Interface	USB
Light transmission (%)	80%


Power	
Power input	9~36V DC
Power Consumption	MAX: 22.2W(APC-3594P) MAX: 18.1W(APC-3594R)

## Dimensions

Standard ▶

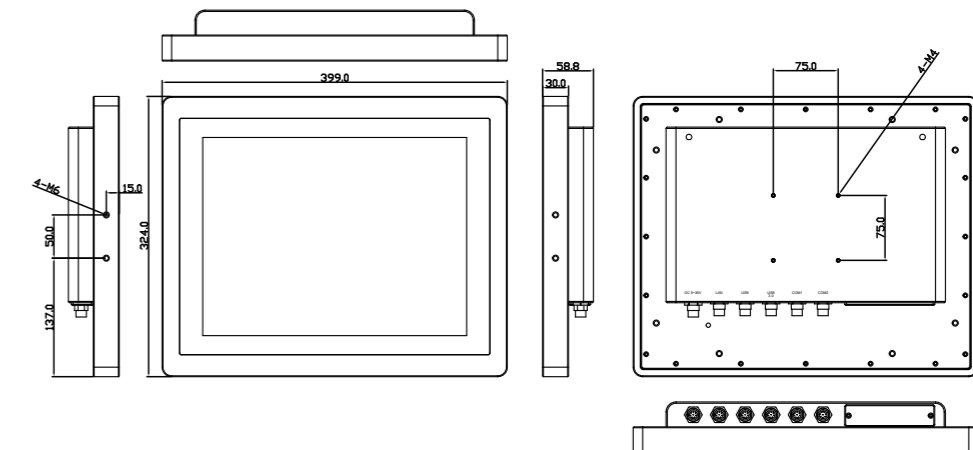

Optional I/O (either one) ▼

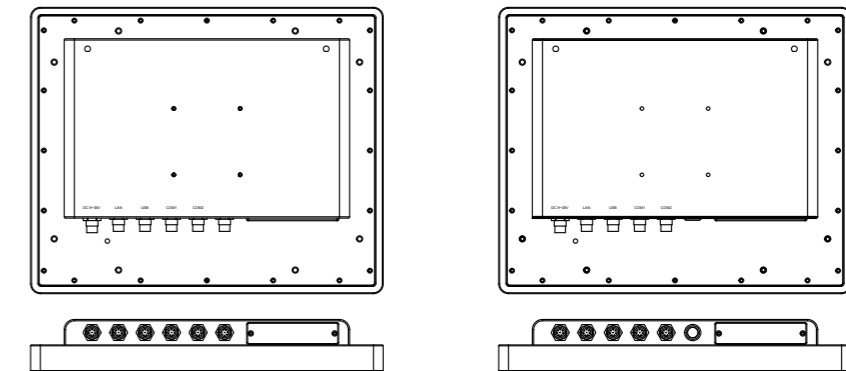

Mechanical	
Construction	Stainless Steel Chassis
IP Rating	Full IP66/IP69K Design
Mounting	Panel Mount/VESA Mount 75 x 75/Wall Mount
Dimension	399 x 324 x 58.8 mm
Net Weight	5.3Kg

Environmental	
Operating temperature(°C)	0°C~50°C
Storage temperature(°C)	-20~60°C (with Industrial SSD)
Storage temperature(°C)	-30°C~70°C
Storage humidity	10 to 90% @ 40°C, non-condensing
Certification	CE/FCC class A

Operating System Support	
Windows 7 Professional for Embedded Systems, Windows 7 Ultimate for Embedded System, Windows Embedded 8.1 Pro, Windows Embedded 8.1 Industry pro	

Ordering information	
APC-3594P-02	15" XGA IP66/IP69K full flat bezel design stainless steel panel PC, Intel® Celeron® Processor N2930, DDR3L 4G on board, 2.5" SATA II 320GB Industrial HDD, with projective capacitive touch, 9~36V DC power input with Adaptor, stainless steel enclosure
APC-3594R-02	15" XGA IP66/IP69K full flat bezel design stainless steel panel PC, Intel® Celeron® Processor N2930, DDR3L 4G on board, 2.5" SATA II 320GB Industrial HDD, with RES. Touch Window, 9~36V DC power input with Adaptor, stainless steel enclosure