



### Features

- 17" steel enclosure industrial displa
- IP65 compliant front bezel
- OSD at front side
- VESA mount 75 x 75
- Anti-reflection glass in front for protection (optional touch panel)
- Default AC 100~240V input, optional DC 11~32V input
- Default: VGA input, Optional: DVI, RCA, and S-Video input



### Specifications

#### I/O Port

|                  |  |
|------------------|--|
| Outside I/O port | <b>Default:</b><br>VGA input<br>AC 100~240V input<br><b>Option (reserved):</b><br>DVI<br>RCA<br>S-Video<br>Touch I/O<br>3-pin terminal block for DC 11~32V input |
| OSD control      | OSD on the front side default, OSD on the rear side for option   |

#### LCD

|                                |                   |
|--------------------------------|-------------------|
| Display Type                   | 17" TFT LCD       |
| Max. Resolution                | 1280 x 1024       |
| Max. Color                     | 16.7M             |
| Contrast Ratio                 | 800: 1            |
| View Angle                     | 160 (H) / 140 (V) |
| Backlight Lifetime             | 50,000 hrs        |
| Luminance (cd/m <sup>2</sup> ) | 350 nits          |

#### Power

|                   |                               |
|-------------------|-------------------------------|
| Power Input       | AC input / DC 11~32V optional |
| Power Consumption | MAX: 14W                      |


#### Touch Screen – Resistive Type (Option)

|                    |              |
|--------------------|--------------|
| Interface          | USB / RS-232 |
| Light Transmission | Over 80%     |

#### Mechanical

|              |   |
|--------------|---|
| Construction | Black Steel Front Panel<br>Option Front Bezel : 304 S.S. / 316L S.S. / Aluminum Chassis<br>Black Steel Back Cover |
| Mounting     | Panel mount / VESA mount 75 x 75 / Rack Mount (Option)  |
| IP Rating    | Front side IP65   |
| Dimensions   | 439 x 348 x 63 mm   |
| Net Weight   | 6.9 Kg  |

### Dimension

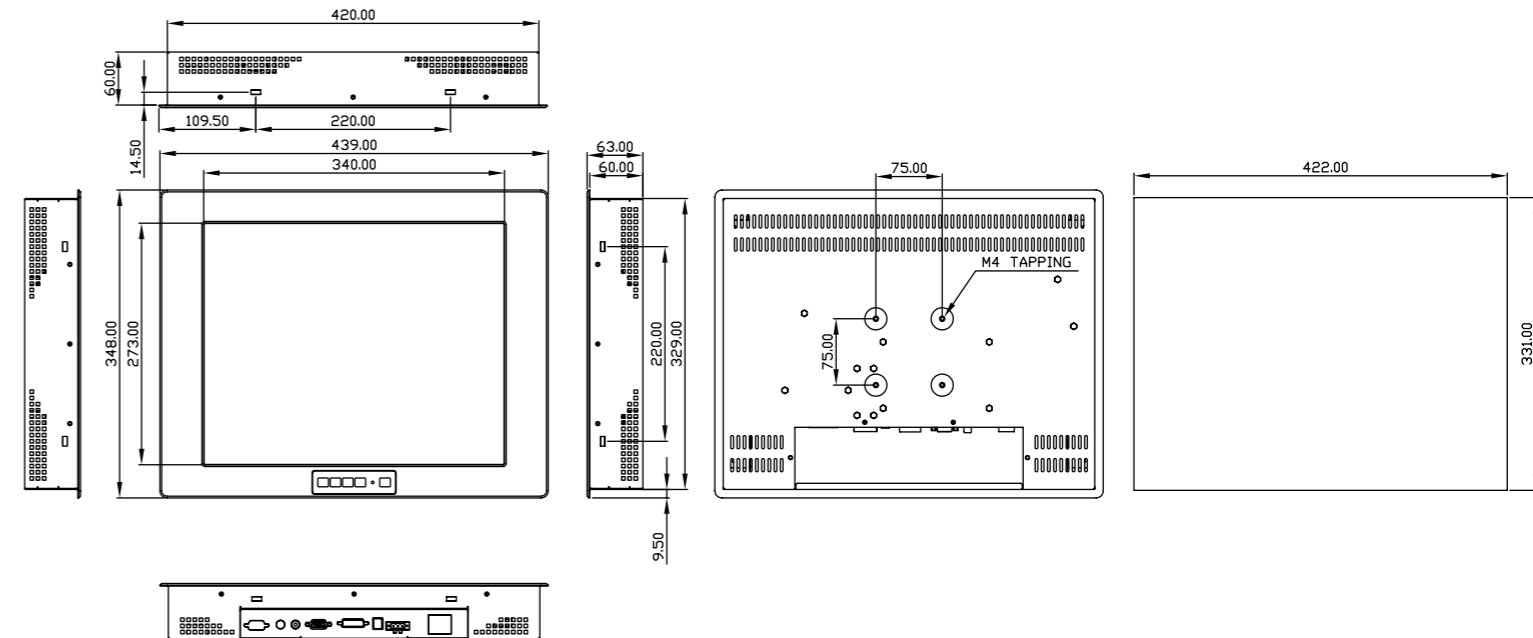

#### Environmental

|                       |                              |
|-----------------------|------------------------------|
| Operating Temperature | 0~50 °C                      |
| Storage Temperature   | -20~60 °C                    |
| Storage Humidity      | 10~90% @40 °C non-condensing |
| Certificate           | CE/FCC Class A               |

#### Ordering Information

|             |  |
|-------------|--|
| ADP-1174-05 | 17" SXGA industrial display, VGA input, 5 keys front OSD, AC 100~240V power input, no touch with protective glass, steel enclosure |
|-------------|--|