

# *iR* Series

## Remote I/O Product Specification



### Contact

Tel: +886-2-22286770  
Fax: +886-2-22286771


Address: 14F., No. 13, Qiaoh Rd., Zhonghe Dist.,  
New Taipei City 235029, Taiwan, R.O.C.

Website: [www.weintek.com](http://www.weintek.com)  
Sales: [salesmail@weintek.com](mailto:salesmail@weintek.com)  
Product Support: [servicemail@weintek.com](mailto:servicemail@weintek.com)

## Table of Contents

|       |  |    |
|-------|--|----|
| 1.    | Product Overview .....   | 1  |
| 1.1   | Product List: .....  | 1  |
| 1.1.1 | Coupler List: .....  | 1  |
| 1.1.2 | Digital I/O List:.....   | 1  |
| 1.1.3 | Analog I/O List:.....  | 1  |
| 1.1.4 | Motion List: .....   | 1  |
| 2.    | Fieldbus Coupler .....   | 2  |
| 2.1   | CANopen Specifications .....                                     | 2  |
| 2.2   | Ethernet TCP/IP Specifications .....                             | 3  |
| 2.3   | EtherCAT Specifications.....                                     | 4  |
| 3.    | Digital Input/Output .....                                       | 5  |
| 3.1   | Digital Input / Output Modules.....                              | 5  |
| 3.2   | Digital Input Specifications .....                               | 5  |
| 3.3   | Digital Output Specifications.....                               | 5  |
| 3.4   | Wiring.....  | 6  |
| 4.    | Analog Input/Output .....  | 7  |
| 4.1   | Analog Input / Output Modules.....                               | 7  |
| 4.2   | Analog Input Specification .....                                 | 7  |
| 4.3   | Analog Output Specification .....                                | 7  |
| 4.4   | Wiring.....  | 8  |
| 5.    | Temperature .....  | 10 |
| 5.1   | Temperature Module .....   | 10 |
| 5.2   | Temperature Specification .....                                  | 10 |
| 5.3   | Wiring.....  | 11 |
| 6.    | Motion Control .....   | 12 |
| 6.1   | Modules Specifications .....                                     | 12 |
| 6.2   | Digital Input Specifications .....                               | 12 |
| 6.3   | Digital Output Specifications.....                               | 12 |
| 6.4   | Wiring.....  | 12 |
| 7.    | Dimensions .....   | 14 |
| 7.1   | iR-COP .....   | 14 |
| 7.2   | iR-ETN.....  | 15 |
| 7.3   | iR-ECAT .....  | 16 |
| 7.4   | iR-DM16-N & P, iR-DQ16-N&P, iR-DI16-K, iR-DQ08-R, iR-PU01-P..... | 17 |
| 7.5   | iR-AI04-VI, iR-AM06-VI, iR-AQ04-VI, iR-AI04-TR .....             | 18 |
| 8.    | Power Consumption .....  | 19 |

# 1. Product Overview

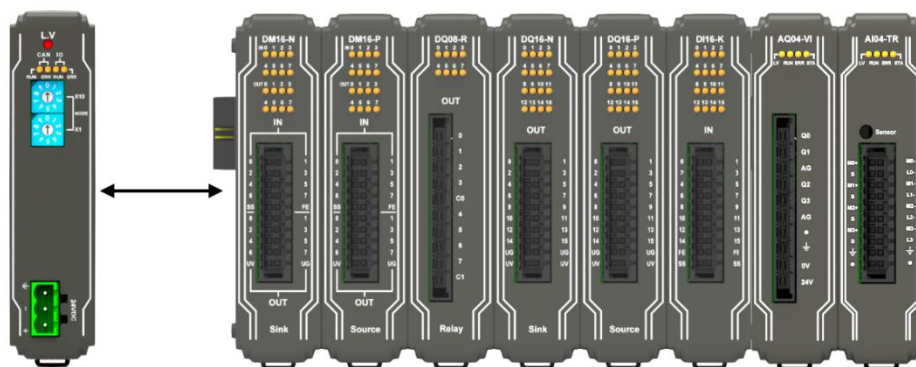

Coupler

Modules

## 1.1 Product List:

### 1.1.1 Coupler List:

| Coupler | Fieldbus                                  |
|---------|---|
| iR-COP  | CANopen Slave                             |
| iR-ETN  | Modbus TCP/IP Server, EtherNet/IP Adapter |
| iR-ECAT | EtherCAT® Slave                           |

### 1.1.2 Digital I/O List:

| Part Number  |       | iR-DI16-K   | iR-DM16-P   | iR-DM16-N   | iR-DQ16-P | iR-DQ16-N | iR-DQ08-R |
|--------------|-------|-------------|-------------|-------------|-----------|-----------|-----------|
| Input Point  | Point | 16          | 8           | 8           | 0         | 0         | 0         |
|              | Type  | Sink/Source | Sink/Source | Sink/Source | N/A       | N/A       | N/A       |
| Output Point | Point | 0           | 8           | 8           | 16        | 16        | 8         |
|              | Type  | N/A         | Source      | Sink        | Source    | Sink      | Relay     |

### 1.1.3 Analog I/O List:

| Part Number  | iR-AI04-VI    | iR-AM06-VI | iR-AQ04-VI | iR-AI04_TR          |
|--------------|---------------|------------|------------|---------------------|
| Type         | ±10v<br>±20mA |            |            | RTD<br>Thermocouple |
| Input Point  | 4             | 4          | 0          | 4                   |
| Output Point | 0             | 2          | 4          | 0                   |

### 1.1.4 Motion List:

| Part Number         | iR-PU01-P |
|---------------------|-----------|
| Differential Output | 2 (A/B)   |
| Differential Input  | 3 (A/B/Z) |
| Input Point         | 4         |
| Output Point        | 4         |

## 2. Fieldbus Coupler

### 2.1 CANopen Specifications

| Communication Interface Specifications |   |   |      |      |      |      |        |
|--|---|---|------|------|------|------|--------|
| <b>Model</b>                           | iR-COP  |   |      |      |      |      |        |
| <b>Expansion I/O Module</b>            | No. of Bus Terminals  | Depends on Power Consumption  |      |      |      |      |        |
|  | Digital Input Point   | Max. 256  |      |      |      |      |        |
|  | Digital Output Point  | Max. 128  |      |      |      |      |        |
|  | Analog Input Channel  | Max. 64   |      |      |      |      |        |
|  | Analog Output Channel   | Max. 64   |      |      |      |      |        |
| <b>Indicators</b>                      | CAN RUN (Green)   | CANopen Status Indicator  |      |      |      |      |        |
|  | CAN ERR (Red)   | CANopen Error Indicator   |      |      |      |      |        |
|  | LV (Red)  | Low Voltage Status Indicator  |      |      |      |      |        |
|  | IO RUN (Green)  | Module Status Indicator   |      |      |      |      |        |
|  | IO ERR (Red)  | Module Error Indicator  |      |      |      |      |        |
| <b>Data Transfer Rate</b>              | 1M  | 800k  | 500k | 250k | 125k | 100k | 50k    |
| <b>Length of the Cable</b>             | 20m   | 50m   | 100m | 250m | 500m | 600m | 1,000m |
| <b>Node ID</b>                         | 1~99  |   |      |      |      |      |        |
| <b>Number of PDOs (CANopen)</b>        | 8 Transmit PDOs / 8 Receive PDOs  |   |      |      |      |      |        |
| <b>Process Data Operating Modes</b>    | synchronous, event-driven ,event timer, polling   |   |      |      |      |      |        |
| <b>Number of SDOs Available</b>        | 1 Standard SDOs   |   |      |      |      |      |        |
| <b>Bus Connection</b>                  | 1 x open style connector, 5-pole, plug included   |   |      |      |      |      |        |
| <b>Additional CANopen Features</b>     | life/node guarding, heartbeat, emergency object, variables mapping, store/restore, output error mode. |   |      |      |      |      |        |
| <b>CAN bus Communication Isolation</b> | Yes   |   |      |      |      |      |        |
| General Specification                  |   |   |      |      |      |      |        |
| <b>Power</b>                           | Power Supply  | 24 VDC (-15%/+20%)  |      |      |      |      |        |
|  | Power Dissipation   | Nominal 100mA@24VDC   |      |      |      |      |        |
|  | Current for Internal Bus  | Max 2A@5VDC   |      |      |      |      |        |
|  | Current Consumption   | 170mA@5VDC  |      |      |      |      |        |
|  | Electrical Isolation  | Isolated Power : Yes  |      |      |      |      |        |
|  | Back-up Fuse  | ≤ 1.6A Self-recovery  |      |      |      |      |        |
| <b>Specification</b>                   | PCB Coating   | Yes   |      |      |      |      |        |
|  | Enclosure   | Plastic   |      |      |      |      |        |
|  | Dimensions WxHxD  | 27 x 109 x 81 mm  |      |      |      |      |        |
|  | Weight  | Approx. 0.15 kg   |      |      |      |      |        |
|  | Mount   | 35mm DIN rail mounting  |      |      |      |      |        |
| <b>Environment</b>                     | Protection Structure  | IP20  |      |      |      |      |        |
|  | Storage Temperature   | -20° ~ 70°C (-4° ~ 158°F)   |      |      |      |      |        |
|  | Operating Temperature   | 0° ~ 55°C (32° ~ 131°F)   |      |      |      |      |        |
|  | Relative Humidity   | 10% ~ 90% (non-condensing)  |      |      |      |      |        |
| <b>Connection</b>                      | Cross-section   | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> , stranded, solid wire, AWG 26-12   |      |      |      |      |        |
| <b>Certification</b>                   | EMC Immunity  | Conforms to<br>EN 55032: 2012+AC: 2013, Class A<br>EN 61000-6-4: 2007+A1:2011<br>EN 55024: 2010+A1: 2015<br>EN 61000-6-2:2005 |      |      |      |      |        |
|  | UL  | cULus Listed  |      |      |      |      |        |

## 2.2 Ethernet TCP/IP Specifications

| Communication Interface Specifications   |   |   |
|--|---|---|
| <b>Model</b>                             | iR-ETN  |   |
| <b>Expansion I/O Module</b>              | Number of Bus Terminals   | Depends on Power Consumption  |
|  | Digital Input Point   | Max. 256  |
|  | Digital Output Point  | Max. 128  |
|  | Analog Input Channel  | Max. 64   |
|  | Analog Output Channel   | Max. 64   |
| <b>Indicators</b>                        | ENET ACK (Green)  | Device Status Indicator   |
|  | ENET ERR (Red)  | Device Error Indicator  |
|  | L.V (Red )  | Low Voltage Status Indicator  |
|  | IO RUN (Green)  | Module Status Indicator   |
|  | IO ERR (Red)  | Module Error Indicator  |
| <b>Data Transfer Rate</b>                | 10/100 Mbps   |   |
| <b>Data Transfer Medium</b>              | 4 x 2 twisted pair copper cable; category 3 (10 Mbps), category 5 (100 Mbps)    |   |
| <b>Distance Between Stations</b>         | 100 m between hub/switch and Bus Coupler or between Bus Coupler and Bus Coupler |   |
| <b>Protocol</b>                          | Modbus TCP/IP Server, EtherNet/IP adapter                                       |   |
| <b>Max. Number of TCP/IP Connections</b> | 8 connections   |   |
| <b>Topology</b>                          | line or star wiring   |   |
| <b>Network to Logic Isolation</b>        | Yes   |   |
| General Specification                    |   |   |
| <b>Power</b>                             | Power Supply  | 24 VDC (-15%/+20%)  |
|  | Power Dissipation   | Nominal 100mA@24VDC   |
|  | Current for-Internal Bus  | Max 2A@5VDC   |
|  | Current Consumption   | 220mA@5VDC  |
|  | Electrical Isolation  | Logic to Field Power Isolation: Yes   |
|  | Back-up Fuse  | ≤ 1.6A Self-recovery  |
| <b>Specification</b>                     | PCB Coating   | Yes   |
|  | Enclosure   | Plastic   |
|  | Dimensions WxHxD  | 27 x 109 x 81 mm  |
|  | Weight  | Approx. 0.15 kg   |
|  | Mount   | 35mm DIN rail mounting  |
| <b>Environment</b>                       | Protection Structure  | IP20  |
|  | Storage Temperature   | -20° ~ 70°C (-4° ~ 158°F)   |
|  | Operating Temperature   | 0° ~ 55°C (32° ~ 131°F)   |
|  | Relative Humidity   | 10% ~ 90% (non-condensing)  |
| <b>Certification</b>                     | EMC Immunity  | Conforms to<br>EN 55032: 2012+AC: 2013, Class A<br>EN 61000-6-4: 2007+A1:2011<br>EN 55024: 2010+A1: 2015<br>EN 61000-6-2:2005 |
|  | UL  | cULus Listed  |

## 2.3 EtherCAT Specifications

| Communication Interface Specifications |   |   |
|--|---|---|
| <b>Model</b>                           | iR-ECAT   |   |
| <b>Expansion I/O Module</b>            | Number of Bus Terminals   | Depends on Power Consumption  |
|  | Digital Input Point   | Max. 256  |
|  | Digital Output Point  | Max. 128  |
|  | Analog Input Channel  | Max. 64   |
|  | Analog Output Channel   | Max. 64   |
| <b>Indicators</b>                      | ECAT Run (Green)  | Device Status Indicator   |
|  | ECAT ERR (Red)  | Device Error Indicator  |
|  | L.V (Red )  | Low Voltage Status Indicator  |
|  | IO RUN (Green)  | Module Status Indicator   |
|  | IO ERR (Red)  | Module Error Indicator  |
| <b>Data Transfer Rate</b>              | 100 Mbps  |   |
| <b>Data Transfer Medium</b>            | 4 x 2 twisted pair copper cable; category 5 (100 Mbps)                          |   |
| <b>Distance Between Stations</b>       | 100 m between hub/switch and Bus Coupler or between Bus Coupler and Bus Coupler |   |
| <b>Protocol</b>                        | EtherCat Slave  |   |
| <b>MailBox</b>                         | COE -SDO requests, SDO responses.   |   |
| <b>ETG Standards</b>                   | ETG 5001  |   |
| <b>Network to Logic Isolation</b>      | Yes   |   |
| General Specification                  |   |   |
| <b>Power</b>                           | Power Supply  | 24 VDC (-15%/+20%)  |
|  | Power Dissipation   | Nominal 100mA@24VDC   |
|  | Current for-Internal Bus  | Max 2A@5VDC   |
|  | Current Consumption   | 270mA@5VDC  |
|  | Electrical Isolation  | Logic to Field Power Isolation: Yes   |
|  | Back-up Fuse  | ≤ 1.6A Self-recovery  |
| <b>Specification</b>                   | PCB Coating   | Yes   |
|  | Enclosure   | Plastic   |
|  | Dimensions WxHxD  | 27 x 109 x 81 mm  |
|  | Weight  | Approx. 0.15 kg   |
|  | Mount   | 35mm DIN rail mounting  |
| <b>Environment</b>                     | Protection Structure  | IP20  |
|  | Storage Temperature   | -20° ~ 70°C (-4° ~ 158°F)   |
|  | Operating Temperature   | 0° ~ 55°C (32° ~ 131°F)   |
|  | Relative Humidity   | 10% ~ 90% (non-condensing)  |
| <b>Certification</b>                   | EMC Immunity  | Conforms to<br>EN 55032: 2012+AC: 2013, Class A<br>EN 61000-6-4: 2007+A1:2011<br>EN 55024: 2010+A1: 2015<br>EN 61000-6-2:2005 |
|  | UL  | cULus Listed  |



EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany

### 3. Digital Input/Output

#### 3.1 Digital Input / Output Modules

| Module Name   |                       | iR-DI16-K   | iR-DM16-P | iR-DM16-N | iR-DQ16-P | iR-DQ16-N | iR-DQ08-R       |
|---------------|-----------------------|---|-----------|-----------|-----------|-----------|-----------------|
| Specification | PCB Coating           | No  |           |           |           |           |                 |
|               | Enclosure             | Plastic   |           |           |           |           |                 |
|               | Dimensions WxHxD      | 27 x 109 x 81 mm  |           |           |           |           |                 |
|               | Weight                | Approx. 0.12 kg   |           |           |           |           | Approx. 0.13 kg |
|               | Mount                 | 35mm DIN rail mounting  |           |           |           |           |                 |
| Environment   | Protection Structure  | IP20  |           |           |           |           |                 |
|               | Storage Temperature   | -20° ~ 70°C (-4° ~ 158°F)   |           |           |           |           |                 |
|               | Operating Temperature | 0° ~ 55°C (32° ~ 131°F)   |           |           |           |           |                 |
|               | Relative Humidity     | 10% ~ 90% (non-condensing)  |           |           |           |           |                 |
| Connection    | Cross-section         | AWG 28-16   |           |           |           |           | AWG 24-16       |
|               | EMC Immunity          | Conforms to<br>EN 55032: 2012+AC: 2013, Class A<br>EN 61000-6-4: 2007+A1:2011<br>EN 55024: 2010+A1: 2015<br>EN 61000-6-2:2005 |           |           |           |           |                 |
|               | UL                    | cULus Listed  |           |           |           |           |                 |

#### 3.2 Digital Input Specifications


| Module Name              |         | iR-DI16-K           | iR-DM16-P  | iR-DM16-N  |
|--------------------------|---------|---------------------|------------|------------|
| Number of Inputs         |         | 16                  | 8          | 8          |
| Input Logic              |         | Sink or Source      |            |            |
| Current Consumption      |         | 83mA@5VDC           | 130mA@5VDC | 130mA@5VDC |
| HIGH Level Input Voltage |         | 15~28 VDC           |            |            |
| LOW Level Input Voltage  |         | 0~5 VDC             |            |            |
| Response Time            | OFF->ON | 5 ms                |            |            |
|                          | ON->OFF | 1 ms                |            |            |
| Input Impedance          |         | 5.6 KΩ              |            |            |
| System Indicators        |         | Red LED Input State |            |            |
| Isolation                |         | Optical Isolation   |            |            |

#### 3.3 Digital Output Specifications


| Module Name         |        | iR-DM16-P                | iR-DQ16-P  | iR-DM16-N                 | iR-DQ16-N  | iR-DQ08-R                  |
|---------------------|--------|--------------------------|------------|---------------------------|------------|----------------------------|
| Number of Outputs   |        | 8                        | 16         | 8                         | 16         | 8                          |
| Output Logic        |        | Source                   |            | Sink                      |            | Relay                      |
| Current Consumption |        | 130mA@5VDC               | 196mA@5VDC | 130mA@5VDC                | 205mA@5VDC | 220mA@5VDC                 |
| Output Voltage      |        | 11~28VDC                 |            | 11~28VDC                  |            | 250VAC/<br>30VDC           |
| Output Current      |        | 0.5A per channel Max 4A) |            | 0.5A per channel (Max 4A) |            | 2A per channel<br>(Max 8A) |
| Response Time       | OFF→ON | 300μs                    |            | 300μs                     |            | 10ms                       |
|                     | ON→OFF |                          |            |                           |            |                            |
| Isolation           |        | Optical Isolation        |            |                           |            | Electromagnetic Isolation  |

### 3.4 Wiring


iR-DM16-P

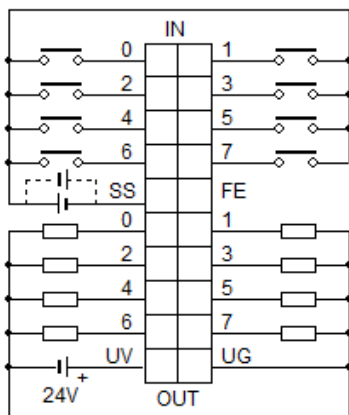


iR-DM16-N

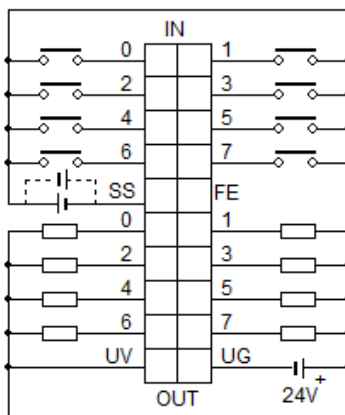


iR-DQ16-N

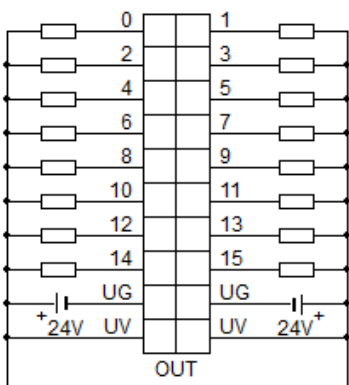


iR-DQ16-P

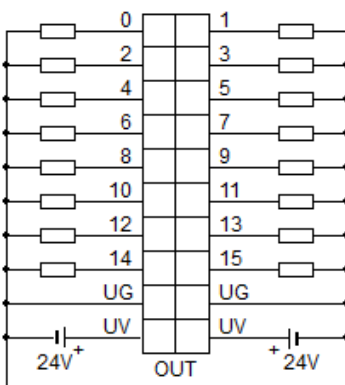

iR-DI16-K

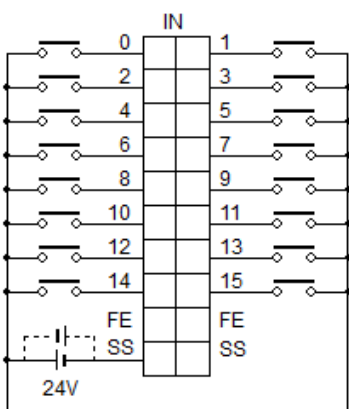

iR-DQ08-R

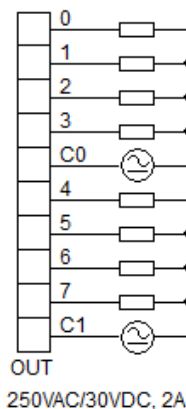



## 4. Analog Input/Output

### 4.1 Analog Input / Output Modules

| Module Name              |                       | iR-AI04-VI  | iR-AM06-VI                 | iR-AQ04-VI                 |
|--------------------------|-----------------------|---|----------------------------|----------------------------|
| Number of Analog Inputs  |                       | 4 ( $\pm 10V / \pm 20mA$ )  | 4 ( $\pm 10V / \pm 20mA$ ) | 0                          |
| Number of Analog outputs |                       | 0   | 2 ( $\pm 10V / \pm 20mA$ ) | 4 ( $\pm 10V / \pm 20mA$ ) |
| Current Consumption      |                       | 70mA@5VDC   | 70mA@5VDC                  | 65mA@5VDC                  |
| Analog Power Supply      |                       | 24 VDC ( 20.4 VDC~28.8 VDC ) ( -15%~+20% )  |                            |                            |
| Specification            | PCB Coating           | Yes   |                            |                            |
|                          | Enclosure             | Plastic   |                            |                            |
|                          | Dimensions WxHxD      | 27 x 109 x 81 mm  |                            |                            |
|                          | Weight                | Approx. 0.12 kg   |                            |                            |
|                          | Mount                 | 35mm DIN rail mounting  |                            |                            |
| Environment              | Protection Structure  | IP20  |                            |                            |
|                          | Storage Temperature   | $-20^{\circ} \sim 70^{\circ}C$ ( $-4^{\circ} \sim 158^{\circ}F$ )   |                            |                            |
|                          | Operating Temperature | $0^{\circ} \sim 55^{\circ}C$ ( $32^{\circ} \sim 131^{\circ}F$ )   |                            |                            |
|                          | Relative Humidity     | 10% ~ 90% (non-condensing)  |                            |                            |
| Connection               | Cross-section         | AWG 28-16   |                            | AWG 24-16                  |
|                          | EMC Immunity          | Conforms to<br>EN 55032: 2012+AC: 2013, Class A<br>EN 61000-6-4: 2007+A1:2011<br>EN 55024: 2010+A1: 2015<br>EN 61000-6-2:2005 |                            |                            |
| Certification            | UL                    | cULus Listed  |                            |                            |



### 4.2 Analog Input Specification


|                 |   |               |                |                 |                |
|-----------------|---|---------------|----------------|-----------------|----------------|
| Input Range     | $-10V \sim 10V$ 、 $-20mA \sim 20mA$   |               |                |                 |                |
| Conversion Time | 2ms/Channel   |               |                |                 |                |
| Isolation       | 500 VDC : (Analog / Digital)  |               |                |                 |                |
| Data Format     | $-10 \sim 10V$  | $-5V \sim 5V$ | $1 \sim 5V$    | $-20 \sim 20mA$ | $4 \sim 20mA$  |
|                 | $\pm 32000$   | $\pm 32000$   | $0 \sim 32000$ | $\pm 32000$     | $0 \sim 32000$ |
| Resolution      | 0.312mV   | 0.156mV       | 0.156mV        | 0.625uA         | 0.625uA        |
|                 | 16 bit  | 16 bit        | 15 bit         | 16 bit          | 15 bit         |
| Input Impedance | 1M $\Omega$   |               |                | 250 $\Omega$    |                |
| Diagnose        | Supply Voltage<br>Wire break ( $1 \sim 5V$ & $4 \sim 20mA$ )<br>Overflow/underflow            |               |                |                 |                |
| Accuracy        | $\pm 0.2\%$ Full Scale@ $25^{\circ}C$<br>$\pm 0.3\%$ Full Scale@ $0^{\circ} \sim 55^{\circ}C$ |               |                |                 |                |

### 4.3 Analog Output Specification

|                  |   |               |                |                  |                |
|------------------|---|---------------|----------------|------------------|----------------|
| Output Range     | $-10V \sim 10V$ 、 $-20mA \sim 20mA$   |               |                |                  |                |
| Conversion Time  | 1.6ms/4 channels  |               |                |                  |                |
|                  | 1.3ms/3 channels  |               |                |                  |                |
|                  | 1ms/2 channels  |               |                |                  |                |
|                  | 700us/1 channel   |               |                |                  |                |
| Isolation        | 500 VDC : (Analog / Digital)  |               |                |                  |                |
| Data Format      | $-10 \sim 10V$  | $-5V \sim 5V$ | $1 \sim 5V$    | $-20 \sim 20mA$  | $4 \sim 20mA$  |
|                  | $\pm 32000$   | $\pm 32000$   | $0 \sim 32000$ | $\pm 32000$      | $0 \sim 32000$ |
| Resolution       | 5mV   | 5mV           | 5mV            | 10uA             | 10uA           |
|                  | 12bit   | 11bit         | 10bit          | 12bit            | 11bit          |
| Output Impedance | $\geq 1k\Omega$   |               |                | $\leq 500\Omega$ |                |
| Diagnose         | Supply Voltage<br>Wire break  |               |                |                  |                |
| Accuracy         | $\pm 0.2\%$ Full Scale@ $25^{\circ}C$<br>$\pm 0.3\%$ Full Scale@ $0^{\circ} \sim 55^{\circ}C$ |               |                |                  |                |

### 4.4 Wiring

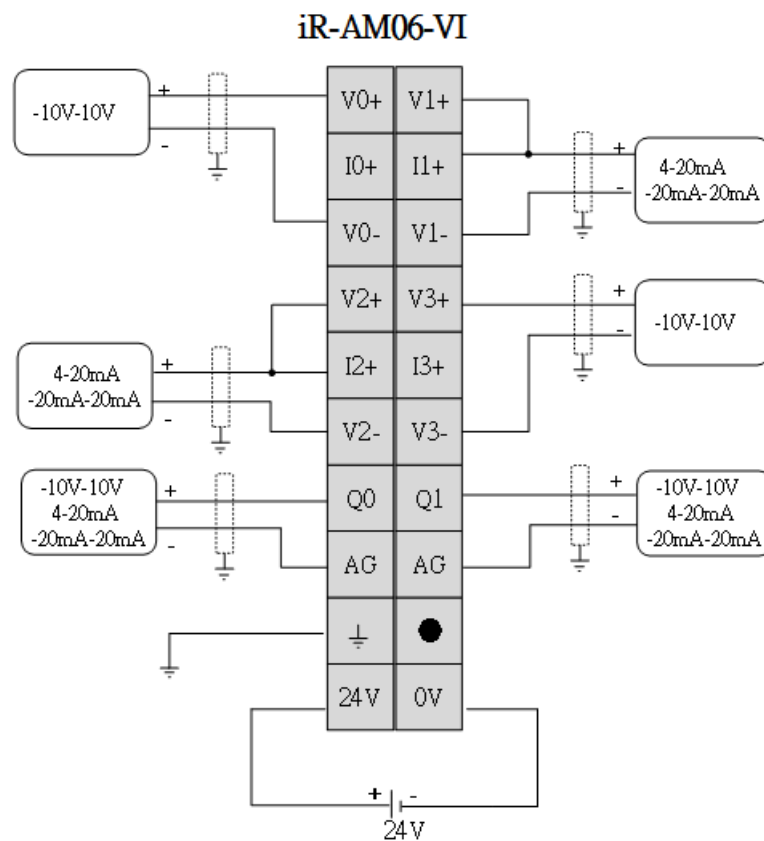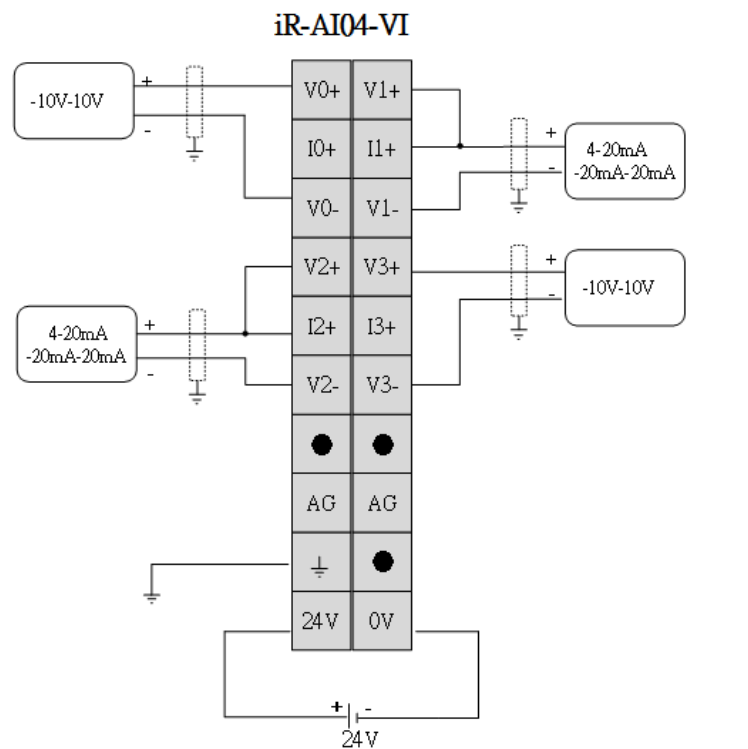

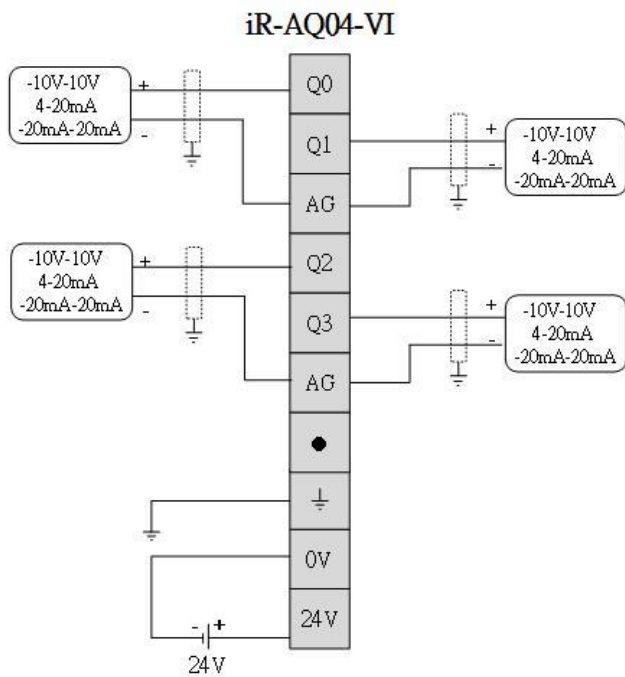

## 5. Temperature

### 5.1 Temperature Module


|                                 |                              |   |
|---------------------------------|------------------------------|---|
| <b>Module Name</b>              |                              | <b>iR-AI04-TR</b>   |
| <b>Number of Input Channels</b> |                              | 4 (RTD/Thermocouple)  |
| <b>Current Consumption</b>      |                              | 65mA@5VDC   |
| <b>Analog Power Supply</b>      |                              | 24 VDC ( 20.4 VDC~28.8 VDC ) ( -15%~+20% )  |
| <b>Specification</b>            | <b>PCB Coating</b>           | Yes   |
|                                 | <b>Enclosure</b>             | Plastic   |
|                                 | <b>Dimensions WxHxD</b>      | 27 x 109 x 81 mm  |
|                                 | <b>Weight</b>                | Approx. 0.12 kg   |
|                                 | <b>Mount</b>                 | 35mm DIN rail mounting  |
| <b>Environment</b>              | <b>Protection Structure</b>  | IP20  |
|                                 | <b>Storage Temperature</b>   | -20° ~ 70°C (-4° ~ 158°F)   |
|                                 | <b>Operating Temperature</b> | 0° ~ 55°C (32° ~ 131°F)   |
|                                 | <b>Relative Humidity</b>     | 10% ~ 90% (non-condensing)  |
| <b>Connection</b>               | <b>Cross-section</b>         | AWG 28-16   |
| <b>Certification</b>            | <b>EMC Immunity</b>          | Conforms to<br>EN 55032: 2012+AC: 2013, Class A<br>EN 61000-6-4: 2007+A1:2011<br>EN 55024: 2010+A1: 2015<br>EN 61000-6-2:2005 |
|                                 | <b>UL</b>                    | cULus Listed  |

### 5.2 Temperature Specification

|                        | Type                | Standard         | Material  | Temperature Range        |                   |
|------------------------|---------------------|------------------|---|--------------------------|-------------------|
|                        | <b>Thermocouple</b> | J                | IEC 60584   | Fe-CuNi                  | -210 °C - 1200 °C |
| K                      |                     | NiCr-Ni          |   | -270 °C - 1370 °C        |                   |
| R                      |                     | PtRh-Pt (Pt 13%) |   | -50 °C - 1760 °C         |                   |
| S                      |                     | PtRh-Pt (Pt 10%) |   | -50 °C - 1760 °C         |                   |
| T                      |                     | Cu-CuNi          |   | -270 °C - 400 °C         |                   |
| E                      |                     | NiCr-CuNi        |   | -200 °C - 1000 °C        |                   |
| N                      |                     | NiCrSi-NiSi      |   | -270 °C - 1300 °C        |                   |
| B                      |                     | PtRh-PtRh        |   | 200 °C - 1820 °C         |                   |
| C                      |                     | W-Re(IEC 584)    |   | 0 °C - 2320 °C           |                   |
| L                      |                     | DIN 43714        | Fe-CuNi   | 0 °C - 900 °C            |                   |
| U                      |                     |                  | Cu-CuNi   | -200 °C - 600 °C         |                   |
| TXK/XK(L)              |                     | P8.585-2001      | Ni-9.5%Cr/Cu-44%Ni-13% Rh   | -200 °C - -800 °C        |                   |
| TBP / BP(A)-1          |                     |                  | W-5%Re/W-20%Re  | 0-2500                   |                   |
| TBP / BP(A)-2          |                     |                  | W-5%Re/W-20%Re  | 0-1800                   |                   |
| TBP / BP(A)-3          |                     |                  | W-5%Re/W-20%Re  | 0-1800                   |                   |
| M                      |                     |                  | Cu-CuNi   | -200-100                 |                   |
| <b>Conversion Time</b> |                     |                  | 100ms/channel   |                          |                   |
| <b>Resolution</b>      |                     |                  | 0.1°C/0.1°F   |                          |                   |
| <b>Accuracy</b>        |                     |                  | ± [0.4 % + 3°C] Full Scale @ 25°C<br>± [0.6 % + 3°C] Full Scale @ 0° ~ 55°C |                          |                   |
| <b>RTD</b>             | <b>Type</b>         |                  | <b>Temperature Coefficient</b>  | <b>Temperature Range</b> |                   |
|                        | Pt100               |                  |   | α: 0.00385               | -200°C ~850°C     |
|                        |                     |                  |   | α: 0.00392               | -200°C ~660°C     |
|                        | jPt100              |                  |   | JIS C 1609               | -200°C ~600°C     |
|                        | PT200               |                  |   | α: 0.00385               | -200°C ~850°C     |
|                        | PT500               |                  |   | α: 0.00385               | -200°C ~850°C     |
|                        | Pt1000              |                  |   | α: 0.00385               | -200°C ~850°C     |
|                        |                     |                  |   | α: 0.00392               | -200°C ~660°C     |
|                        | LG-Ni1000           |                  |   | --                       | - 60~250          |
|                        | Ni100               |                  |   | 0.00617                  | -100~180          |
|                        | Ni120               |                  |   | 0.00672                  | -80~260°C         |
| Ni1000                 |                     |                  | 0.00617   | -100~180                 |                   |

|                   |  |   |                   |
|-------------------|--|---|-------------------|
|                   | CU50   | 0.00428   | -50°C ~150°C      |
|                   | CU100  | 0.00428   | -50°C ~150°C      |
|                   | <b>Conversion Time</b>                             | 200ms/channel   |                   |
|                   | <b>Resolution</b>                                  | 0.1°C/0.1°F   |                   |
|                   | <b>Accuracy</b>                                    | ± 0.2 % Full Scale @ 25°C<br>± 0.3 % Full Scale @ 0° ~ 55°C |                   |
| <b>Voltage</b>    | <b>Type</b>  | <b>Conversion Time</b>                                      | <b>Resolution</b> |
|                   | ±2V  | 100ms/channel   | 16bit             |
|                   | ±1V  |   |                   |
|                   | ±500mV   |   |                   |
|                   | ±250mV   |   |                   |
|                   | ±125mV   |   |                   |
|                   | ±62.5mV  |   |                   |
| ±31.25mV          |  |   |                   |
| <b>Resistance</b> | <b>Type</b>  | <b>Conversion Time</b>                                      | <b>Resolution</b> |
|                   | 0-5000Ω (0-30000)                                  | 200ms /channel  | 0.167 Ω           |
|                   | 0-500Ω (0-30000)                                   |   | 0.0167 Ω          |
| <b>Isolation</b>  | 500 VDC : (Analog / Digital)                       |   |                   |
| <b>Diagnose</b>   | Supply Voltage<br>Wire break<br>Overflow/underflow |   |                   |

### 5.3 Wiring

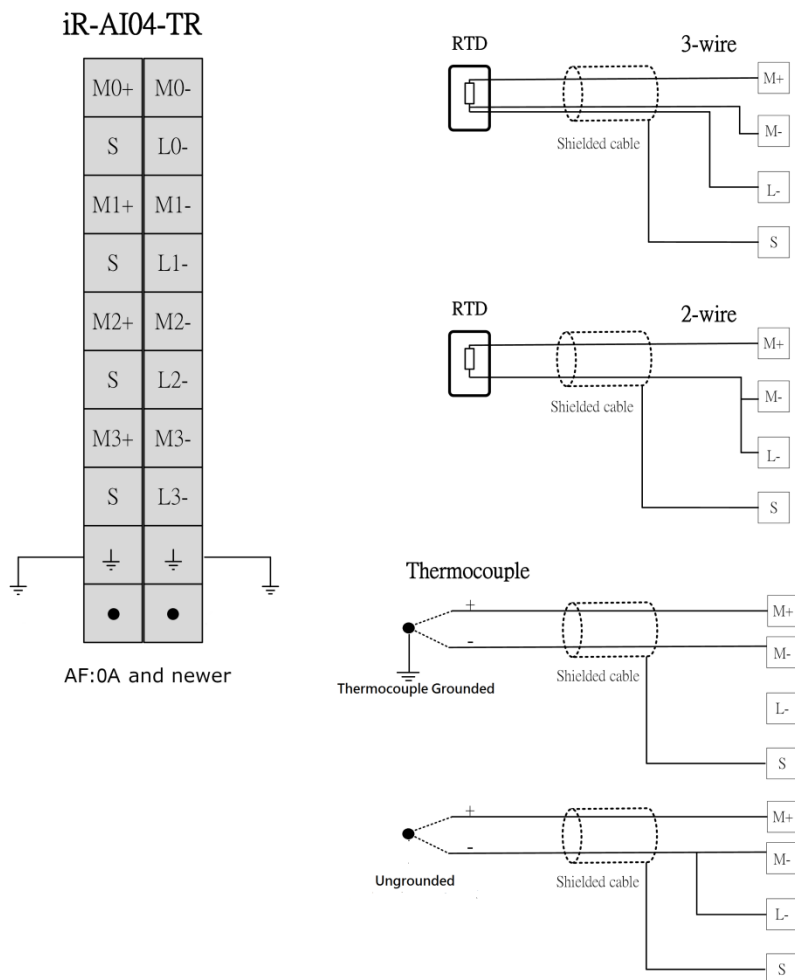

## 6. Motion Control

### 6.1 Modules Specifications

| Module Name    |                       | <b>iR-PU01-P</b>  |
|----------------|-----------------------|---|
| Number of Axis |                       | <b>1- Axis</b>  |
| Specification  | PCB Coating           | Yes   |
|                | Enclosure             | Plastic   |
|                | Dimensions WxHxD      | 27 x 109 x 81 mm  |
|                | Weight                | Approx. 0.12 kg   |
|                | Mount                 | 35mm DIN rail mounting  |
| Environment    | Protection Structure  | IP20  |
|                | Storage Temperature   | -20° ~ 70°C (-4° ~ 158°F)   |
|                | Operating Temperature | 0° ~ 55°C (32° ~ 131°F)   |
|                | Relative Humidity     | 10% ~ 90% (non-condensing)  |
| Connection     | Cross-section         | AWG 28-16   |
| Certification  | EMC Immunity          | Conforms to<br>EN 55032: 2012+AC: 2013, Class A<br>EN 61000-6-4: 2007+A1:2011<br>EN 55024: 2010+A1: 2015<br>EN 61000-6-2:2005 |
|                | UL                    | cULus Listed  |


### 6.2 Digital Input Specifications



| Item                     | Sink Input          | Differential Input                                     |
|--------------------------|---------------------|--|
| Number of Inputs         | 4                   | 3 (A/B/Z phase )                                       |
| Input current            | 24 VDC, 5 mA        | Meets the Requirements of ANSI Standards TIA/EIA-485-A |
| HIGH Level Input Voltage | 15~28 VDC           | -  |
| LOW Level Input Voltage  | 0~5 VDC             | -  |
| Maximum input frequency  | 200KHz              | 2MHz   |
| Input Impedance          | 3 KΩ                | -  |
| Indicators               | Red LED Input State |  |

### 6.3 Digital Output Specifications

| Item                     | Source Output       | Differential Output                                    |
|--------------------------|---------------------|--|
| Number of Outputs        | 4                   | 2(A/B phase )  |
| Output Voltage           | 24VDC , 50 mA       | Meets the Requirements of ANSI Standards TIA/EIA-485-A |
| Maximum Output frequency | 40KHz               | 2MHz   |
| Indicators               | Red LED Input State |  |


### 6.4 Wiring

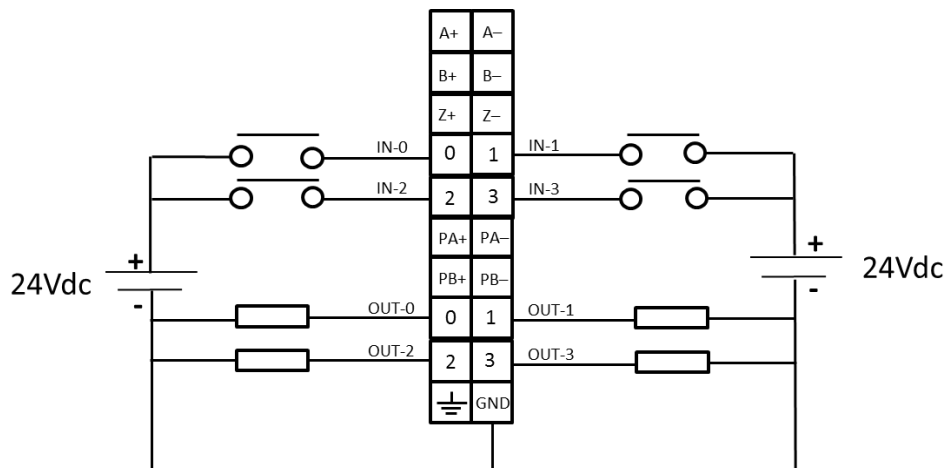

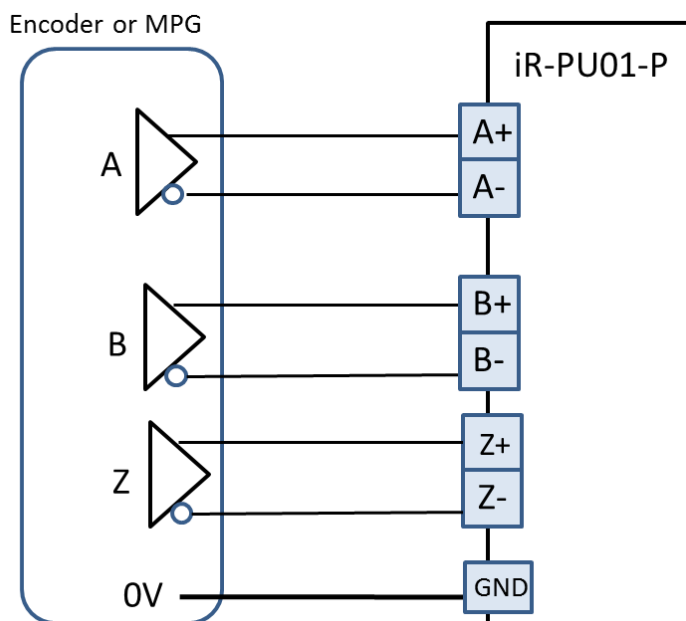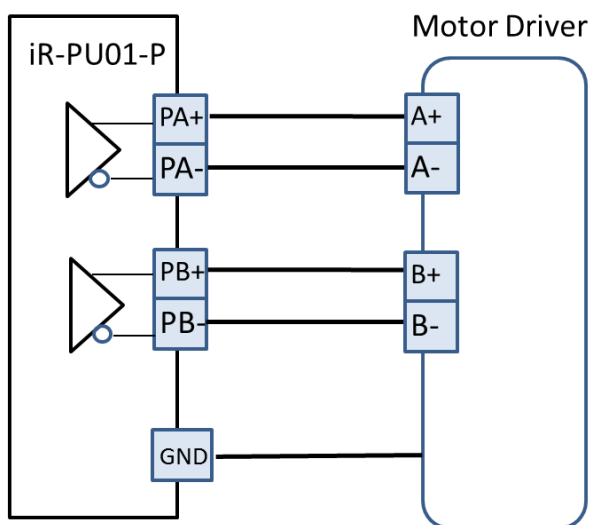


## 7. Dimensions


### 7.1 iR-COP




**Top View**




**Side View**



**Front View**



**Side View**



**Bottom View**


|          |                           |          |                      |
|----------|---------------------------|----------|----------------------|
| <i>a</i> | Node ID Rotary Switch x10 | <i>e</i> | Baud Rate DIP Switch |
| <i>b</i> | Node ID Rotary Switch x1  | <i>f</i> | Expansion Connector  |
| <i>c</i> | CAN Bus Connector         |          |                      |
| <i>d</i> | Power Connector           |          |                      |




## 7.2 iR-ETN




**Top View**



**Side View**



**Front View**



**Side View**




**Bottom View**

|          |                 |          |                     |
|----------|-----------------|----------|---------------------|
| <i>a</i> | Reset Button    | <i>e</i> | Expansion Connector |
| <i>b</i> | LAN 1           |          |                     |
| <i>c</i> | LAN 2           |          |                     |
| <i>d</i> | Power Connector |          |                     |


### 7.3 iR-ECAT




**Top View**



**Side View**



**Front View**



**Side View**




**Bottom View**

|          |                           |          |                     |
|----------|---------------------------|----------|---------------------|
| <i>a</i> | X1-EtherCAT IN            | <i>e</i> | Power Connector     |
| <i>b</i> | X2-EtherCAT Out           | <i>f</i> | Expansion Connector |
| <i>c</i> | Node ID Rotary Switch x10 |          |                     |
| <i>d</i> | Node ID Rotary Switch x1  |          |                     |


7.4 iR-DM16-N & P, iR-DQ16-N&P, iR-DI16-K, iR-DQ08-R, iR-PU01-P



Top View

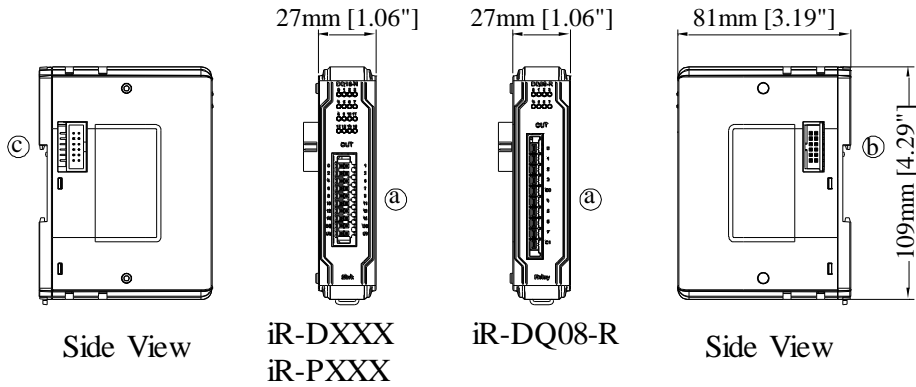


Front View




Bottom View

|          |          |            |                     |
|----------|----------|------------|---------------------|
| <i>a</i> | Terminal | <i>b.c</i> | Expansion Connector |
|----------|----------|------------|---------------------|

7.5 iR-AI04-VI, iR-AM06-VI, iR-AQ04-VI, iR-AI04-TR



Top View

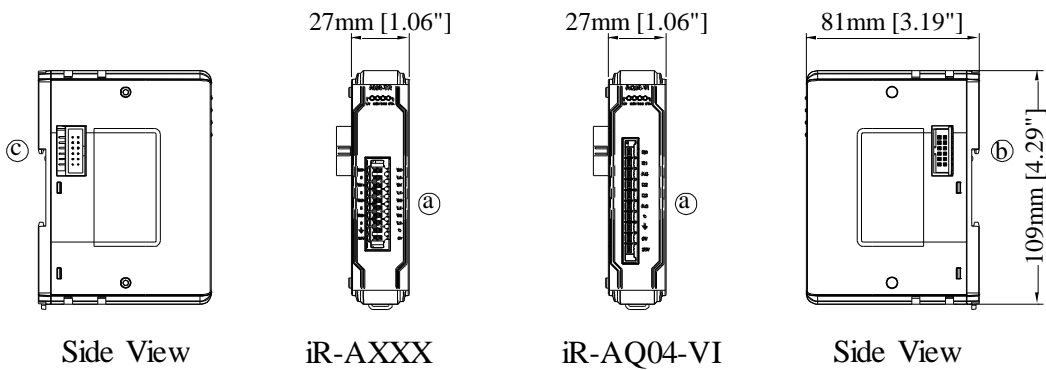


Side View

iR-AXXX

iR-AQ04-VI

Side View



Bottom View

|          |          |            |                     |
|----------|----------|------------|---------------------|
| <i>a</i> | Terminal | <i>b.c</i> | Expansion Connector |
|----------|----------|------------|---------------------|

## 8. Power Consumption

| Type        | Device     | Consumption(5V) | Power Supply(5V) | Power Consumption(24V) |
|-------------|------------|-----------------|------------------|------------------------|
| Coupler     | iR-ETN     | 220mA/1.1 W     | 2A/10w           | 100mA/2.40W            |
|             | iR-COP     | 170mA/0.85 W    | 2A/10w           | 100mA/2.40W            |
|             | iR-ECAT    | 270mA/1.35 W    | 2A/10w           | 100mA/2.40W            |
| Digital I/O | iR-DM16-P  | 130mA/0.65 W    | --               | 53mA/1.27W             |
|             | iR-DM16-N  | 130mA/0.65 W    | --               | 56mA/1.34W             |
|             | iR-DQ08-R  | 220mA/1.1 W     | --               | 84mA/2.02W             |
|             | iR-DQ16-N  | 205mA/1.02 W    | --               | 78mA/1.87W             |
|             | iR-DQ16-P  | 196mA/0.984 W   | --               | 75mA/1.80W             |
|             | iR-DI16-K  | 83mA/0.418 W    | --               | 31mA/0.74W             |
| Analog I/O  | iR-AQ04-VI | 65mA/0.325 W    | --               | 25mA/0.60W             |
|             | iR-AI04-VI | 70mA/0.35 W     | --               | 27mA/0.65W             |
|             | iR-AM06-VI | 70mA/0.35 W     | --               | 27mA/0.65W             |
|             | iR-AI04-TR | 65mA/0.325 W    | --               | 25mA/0.60W             |
| Motion      | iR-PU01-P  | 108mA/0.54 W    | --               | 85mA/2.04W             |

### Note:

The coupler is the only power supply for the modules in this system. Please consider power requirements when connecting multiple modules.

### ex.1

| Device  | Name   | Consumption   | Power Supply |
|---------|--|---------------|--------------|
| Coupler | iR-COP   | 170mA/0.85w   | 2A/10w       |
| Module  | iR-DQ08-R *8   | 220mA*8=1.76A | X            |
| System  | Power consumption : 170mA + 1.76A = 1.93 A<br>Power supply: 2A > 1.93A |               |              |

| Device  | Name  | Power Consumption |
|---------|---|-------------------|
| Coupler | iR-COP  | 100mA             |
| Module  | iR-DQ08-R *8  | 84mA*8=672mA      |
| System  | Power consumption : 100mA + 672mA = 772mA<br>24V Power supply should be greater than: 772mA/18.5W |                   |

### ex.2

| Device  | Name   | Consumption    | Power Supply |
|---------|--|----------------|--------------|
| Coupler | iR-ETN   | 220mA/1.1w     | 2A/10w       |
| Module  | iR-DM16-P *13  | 130mA*13=1.69A | X            |
| System  | Power consumption : 220mA + 1.69A = 1.91 A<br>Power supply: 2A > 1.91A |                |              |

| Device  | Name  | Power Consumption |
|---------|---|-------------------|
| Coupler | iR-ETN  | 100mA             |
| Module  | iR-DM16-P *13   | 53mA*13=689mA     |
| System  | Power consumption : 100mA + 689mA = 789mA<br>24V Power supply should be greater than: 789mA/18.9W |                   |