



2*GE SFP Fiber+8*GE Copper Unmanaged Industrial Ethernet Switch
Size: 143.7*103.8*47.7 mm, DIN Rail-mounted

Overview

The MES-308-2S is an unmanaged industrial Ethernet switch, that supports 2 Gigabit fiber ports and 8 Gigabit copper ports. This ethernet switch is designed to operate in a wide temperature range from -40°C to +80°C and has a strong firmness that can adapt to a variety of harsh environments, and can also be very easily placed in a compact control box. The installation characteristics, wide temperature operation and the shell and LED indicator make this device a plug and play industrial equipment, providing a reliable and convenient networking solution for users' Ethernet equipment.

Features

- ✧ Using high quality photoelectric integrated module to provide good optical and electrical characteristics
- ✧ Reliable data transmission and long life span
- ✧ Support for full-duplex or half-duplex mode, with automatic negotiation capability
- ✧ The network port supports fully automatic cross identification
- ✧ Internal storage and forwarding mechanism, support multiple protocols
- ✧ In line with the industrial-grade operating standards, MBTF in more than 300,000 hours
- ✧ Working power supply: DC 12~52V, providing reverse polarity protection
- ✧ Lightningsurge impact protection of power supply: 5000A (8/20μs)



Specification

Interface and Indicators	
Service Ports	8*10/100/1000Mbps RJ45 copper ports, Full/half duplex mode, Auto MDI/MDI-X connection
	2*1000BaseFX SFP slots
LED Indicators	Power: PWR
	Link/Act for copper and SFP ports
Ethernet Standards	
Standards	IEEE802.3-10BaseT
	IEEE802.3i 10Base-T
	IEEE802.3u-100BaseTX/100Base-FX
	IEEE802.3z-1000BaseX
	IEEE802.3ab-1000BaseT
	IEEE802.3x-flow control
Power Parameters	
Input Voltage	DC12V~52V (dual power redundancy)
Power Connector	Phoenix type connector
Dual Power Redundancy	Supported
Overcurrent Protection	Current limit 4.0A
Reverse Polarity Protection	Supported
Switch Properties	
Transmission Mode	Store-and-forward
MAC Table Size	8K
Packet Buffer Size	2Mbit
Backplane Bandwidth	20G
Switching Latency	<10μs
Power	<8W
Environment Limits	
Operating Temperature	-40~+80°C(-40~180°F)
Storage Temperature	-40~+85°C(-40~185°F)
Ambient Relative Humidity	5%~95% (non-condensing)
Physical Characteristics	
IP Rating	IP40, aluminum shell
Dimensions	143.7mm*103.8mm*47.7mm
Weight	0.64Kg

Installation	DIN-rail mounting Wall mounting
Cooling Method	Fanless natural cooling
Industrial Standards	
EMI	FCC Part 15 Subpart B Class A, EN 55022 Class A
EMS	IEC(EN)61000-4-2(ESD) : Contact: $\pm 8\text{kV}$, Air: $\pm 12\text{kV}$ IEC(EN)61000-4-3(RS) : 10V/m (80~1000MHz) IEC(EN)61000-4-4(EFT) : Ethernet Port: $\pm 2\text{kV CM}/\pm 1\text{kV DM}$; IEC(EN)61000-4-5(Surge): Ethernet Port: $\pm 2\text{kV CM}/\pm 1\text{kV DM}$; IEC(EN)61000-4-6(Conducted RF immunity) : 3V(10kHz~150kHz),10V(150kHz~80MHz) IEC(EN)61000-4-16(Conducted common mode disturbances immunity) : 30V cont. 300V, 1s IEC(EN)61000-4-8
Shock	IEC 60068-2-27
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
MTBF	300,000 hours
Warranty Period	3 years

Outlook and Dimension

Size: 143.7(L)*103.8(W)*47.7(H)mm

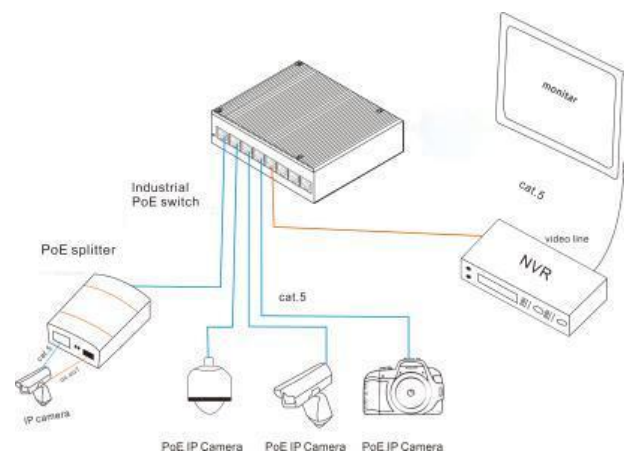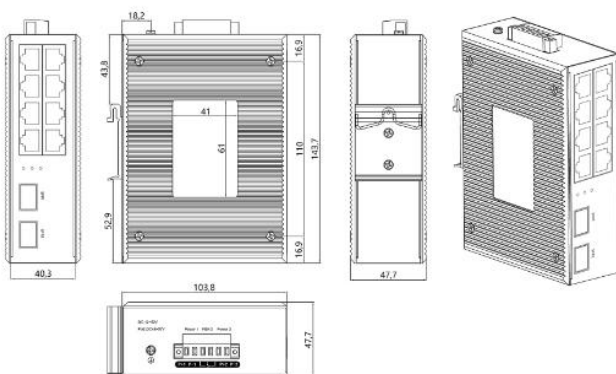

Ordering Information

Model	Description
MES-308-2S	<p>10-port Unmanaged Industrial Ethernet Switch</p> <p>8*10/100/1000M RJ45 Copper</p> <p>2*GE SFP Fiber (optical transceivers are not included),</p> <p>Power supply: DC12~52V;</p> <p>Wide operating temperature:-40°C~+80°C;</p> <p>IP40, Aluminum shell;</p> <p>DIN rail mounting</p>